
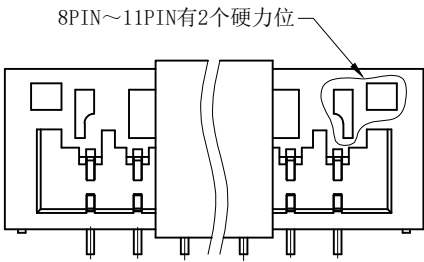
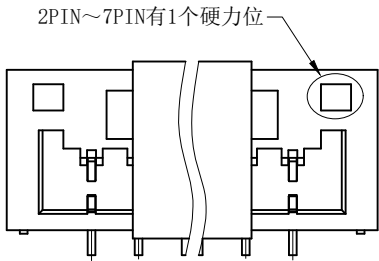
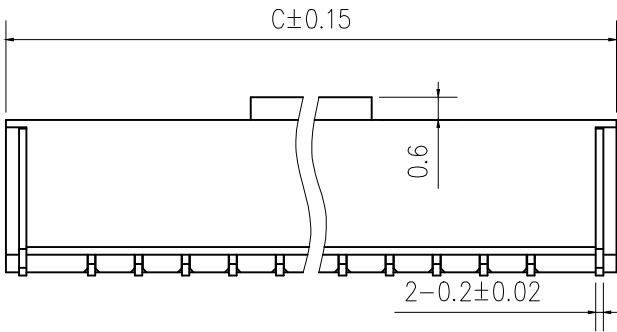
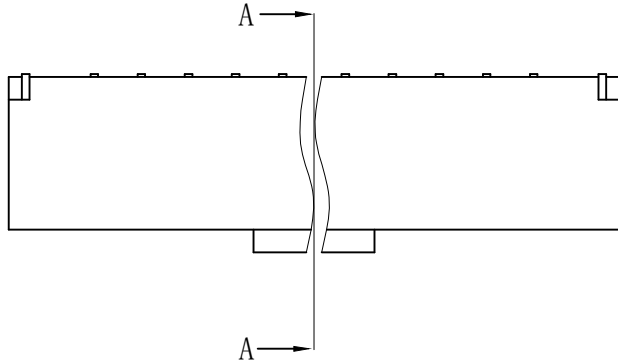
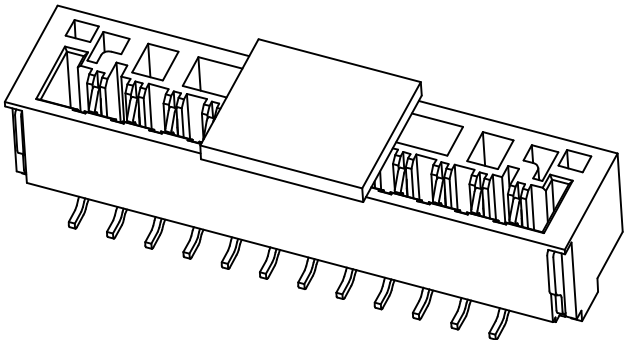


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

Pin	A	B	C	D
2	1.25	3.85	5.80	0.50
3	2.50	5.10	7.05	1.75
4	3.75	6.35	8.30	2.00
5	5.00	7.60	9.55	3.26
6	6.25	8.85	10.80	4.52
7	7.50	10.10	12.05	4.50
8	8.75	11.35	13.30	4.50
9	10.00	12.60	14.55	4.50
10	11.25	13.85	15.80	6.50
11	12.50	15.10	17.05	6.50
12	13.75	16.35	18.30	6.50
13	15.00	17.60	19.55	6.50
14	16.25	18.85	20.80	6.50
15	17.50	20.10	22.05	6.50
16	18.75	21.35	23.30	6.50

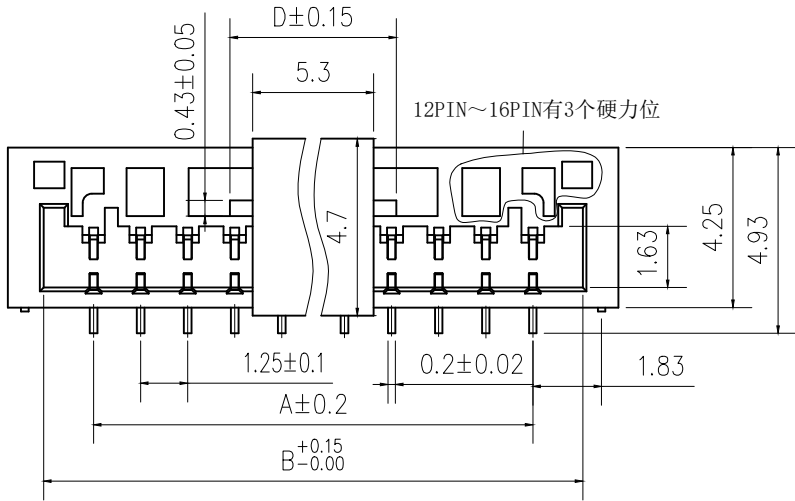

1. 技术参数:

1.1 额定电流: 1.0A AC/DC

1.2 额定电压: 50V AC DC




1.3 耐 电 压: 500V ACminute

1.4 接触电阻: 20mΩ MAX

1.5 绝缘电阻: 500MΩ MIN

2.0 工作温度: -25℃~+85℃

剖面 A-A

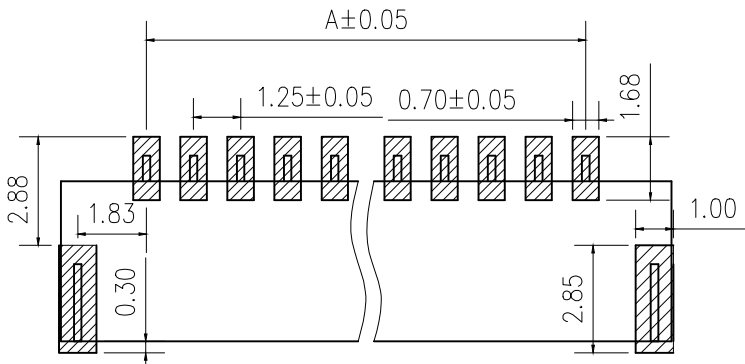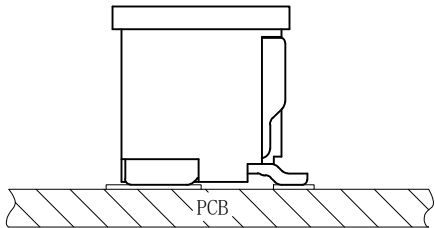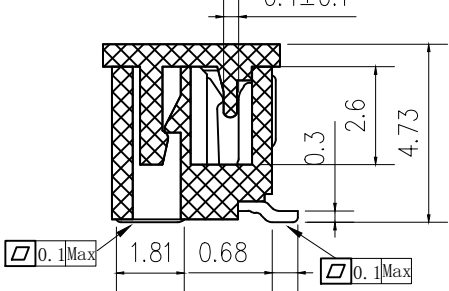

印制线路板



深圳市虹成电子有限公司

GENERAL TOLERANCES
(UNLESS SPECIFIED)

X. X	±0.30
X. XX	±0.20
X. XXX	±0.10
Angle	±3.0°

比 列
SCALE

1:1

单 位
UNIT

MM

张 数
PART NO

1 OF 1

版 本
REV

A

品 名
TITLE
料 号
PART NO

针座

HCZZ0494-7

制 图
DRAW
审 核
CHECKED
批 准
APPROVE

AhYe
夏操云
赵亮亮

