
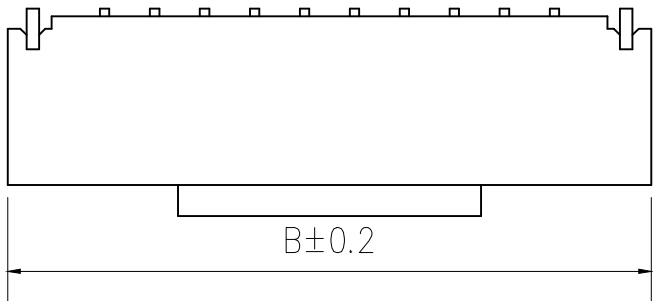
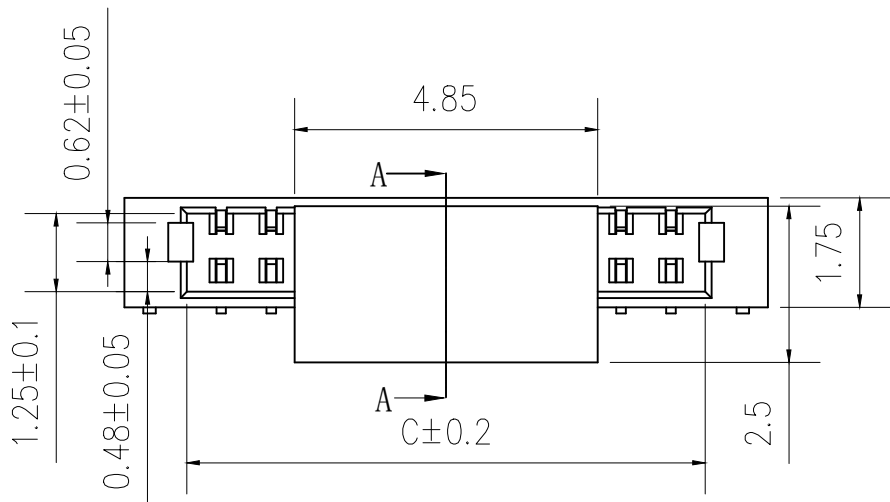
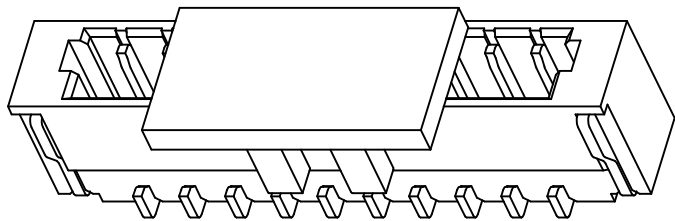





| 标 记<br>MARK | ECN编号/变更内容<br>ECN NO/DEFINITION | 修 改<br>REVISE | 日 期<br>DATE | 核 准<br>APPROVE |
|-------------|---------------------------------|---------------|-------------|----------------|
|             |                                 |               |             |                |
|             |                                 |               |             |                |


| Pin | A     | B     | C     |
|-----|-------|-------|-------|
| 2   | 0.80  | 3.90  | 1.90  |
| 3   | 1.60  | 4.70  | 2.70  |
| 4   | 2.40  | 5.50  | 3.50  |
| 5   | 3.20  | 6.30  | 4.30  |
| 6   | 4.00  | 7.10  | 5.10  |
| 7   | 4.80  | 7.90  | 5.90  |
| 8   | 5.60  | 8.70  | 6.70  |
| 9   | 6.40  | 9.50  | 7.50  |
| 10  | 7.20  | 10.30 | 8.30  |
| 11  | 8.00  | 11.10 | 9.10  |
| 12  | 8.80  | 11.90 | 9.90  |
| 13  | 9.60  | 12.70 | 10.70 |
| 14  | 10.40 | 13.50 | 11.50 |
| 15  | 11.20 | 14.30 | 12.30 |
| 16  | 12.00 | 15.10 | 13.10 |

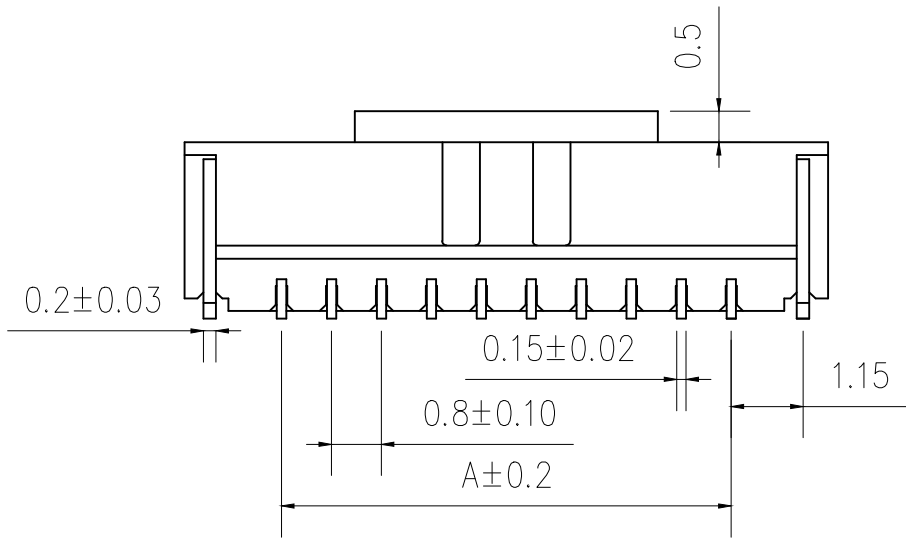

1. 技术参数:
- 1.1 额定电流: 0.5A AC/DC
  - 1.2 额定电压: 50V AC/DC
  - 1.3 耐 电 压: 500V ACminute
  - 1.4 接触电阻: 20mΩ MAX
  - 1.5 绝缘电阻: 100MΩ MIN
  - 2.0 工作温度: -25℃~+85℃

| 2   | 插针  | 铜   | 镀锡    |     |
|-----|-----|-----|-------|-----|
| 1   | 基座  | LCP | 本色    |     |
| 序 号 | 品 名 | 材 质 | 电镀/颜色 | 备 注 |

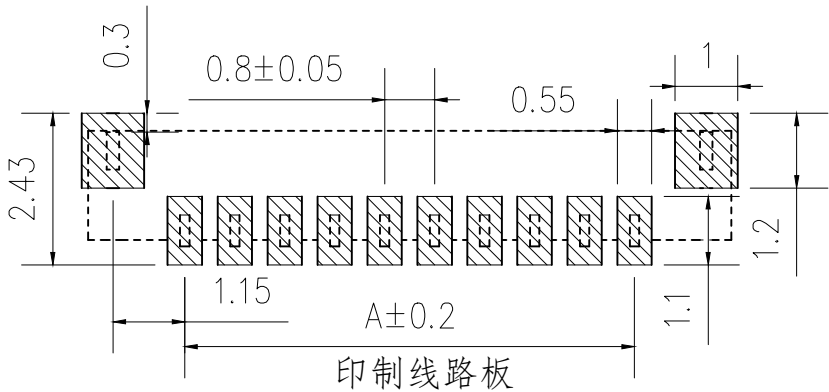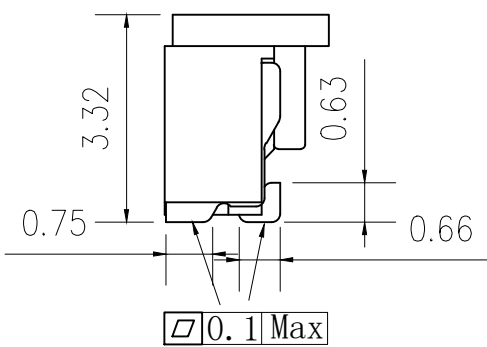

|                                                                                       |             |                |        |                                                                                       |            |                                                                                       |
|---------------------------------------------------------------------------------------|-------------|----------------|--------|---------------------------------------------------------------------------------------|------------|---------------------------------------------------------------------------------------|
|  | 深圳市虹成电子有限公司 |                | 品 名    |                                                                                       | 针座         |                                                                                       |
|                                                                                       |             |                | 料 号    |                                                                                       | HCZZ0530-7 |                                                                                       |
| GENERAL TOLERANCES<br>(UNLESS SPECIFIED)                                              |             | 比 列<br>SCALE   | 1:1    |  |            |                                                                                       |
| X. X                                                                                  | ±0.30       | 单 位<br>UNIT    | MM     | 制 图<br>DRAW                                                                           | AhYe       |  |
| X. XX                                                                                 | ±0.20       | 张 数<br>PART NO | 1 OF 1 | 审 核<br>CHECKED                                                                        | 夏操云        |                                                                                       |
| X. XXX                                                                                | ±0.10       | 版 本<br>REV     | A      | 批 准<br>APPROVE                                                                        | 赵亮亮        |                                                                                       |
| Angle                                                                                 | ±3.0°       |                |        |                                                                                       |            |                                                                                       |