

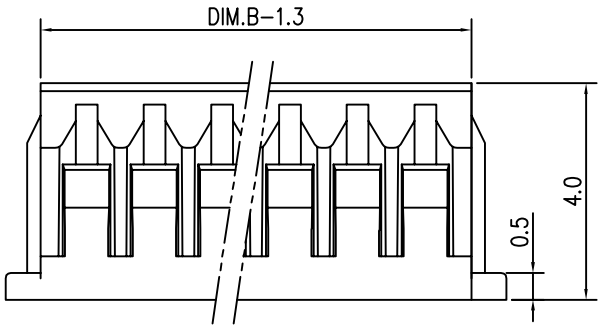
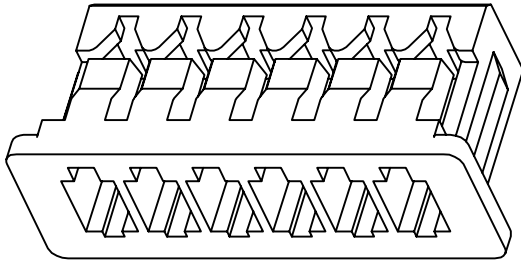


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

Pin	DIM A	DIM B
2	1.25	4.28
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	19.00	21.75

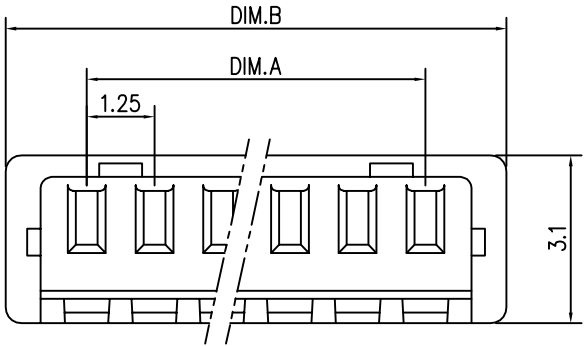

技术要求:

线 数: 2~16

适用线规: AWG32#~28#

适用基板厚度: 0.8mm

温度范围: -25℃~85℃

额定电压: 125V AC/DC


额定电流: 1A

接触电阻: ≤0.02Ω

绝缘电阻: ≥100MΩ

耐 压: 500V AC/minute

1	外壳	PA66	本色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	外壳	
			料 号 PART NO	HC-JK-1.25-2Y	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1		
X.X ±0.35	X' ±3.00'	单 位 UNIT	MM	制 图 DRAW	AhYe
X.XX ±0.25	X.X' ±2.00'	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
X.XXX ±0.15	X.XX' ±1.00'	版 本 REV	A	批 准 APPROVE	赵亮亮

