





Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	TX1+	Second	B11	RX1+	Second
A3	TX1-	Second	B10	RX1-	Second
A4	Vbus	First	B9	Vbus	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	Vbus	First	B4	Vbus	First
A10	RX2-	Second	B3	TX2-	Second
A11	RX2+	Second	B2	TX2+	Second
A12	GND	First	B1	GND	First
SHELL	GND	First			

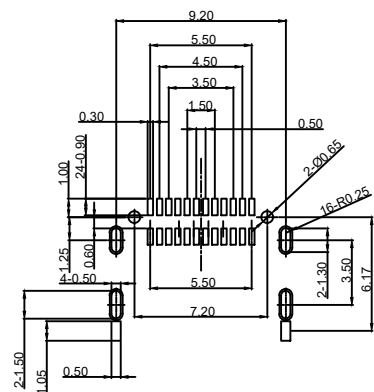

8.OPERATING TEMPERATURE: -40°C~+85°C.

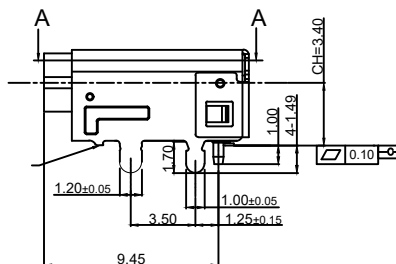

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)

	深圳市虹成电子有限公司		品 名 TITLE		TYPE-C母座	
			料 号 PART NO		HC-TYPE-C-24P-G004	
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 例 SCALE	1 : 1		
X. $\pm$ 0.5 .X° $\pm$ 2° .X $\pm$ 0.3 .XX° $\pm$ 1° .XX $\pm$ 0.1 .XXX° $\pm$ 0.5° .XXX $\pm$ 0.05			单 位 UNIT	MM	制 图 DRAW	AhYe
			张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
			版 本 REV	A	批 准 APPROVE	赵亮亮