

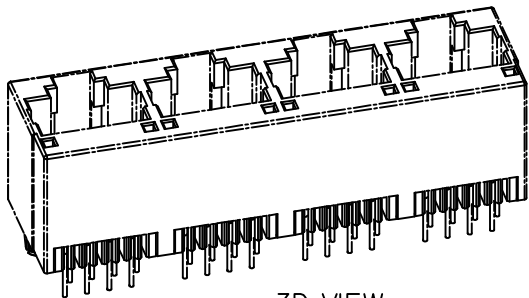
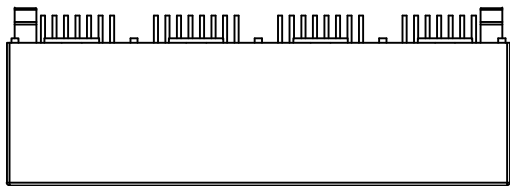
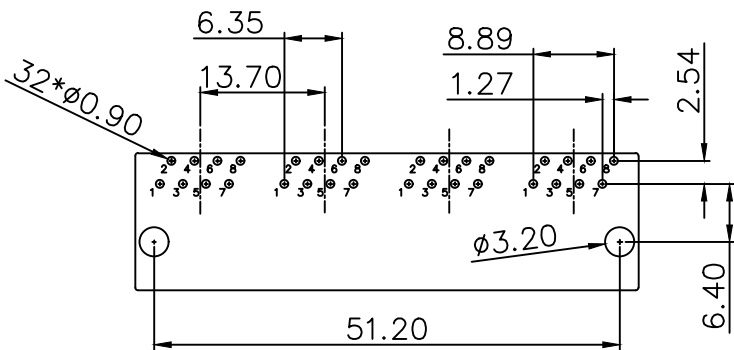
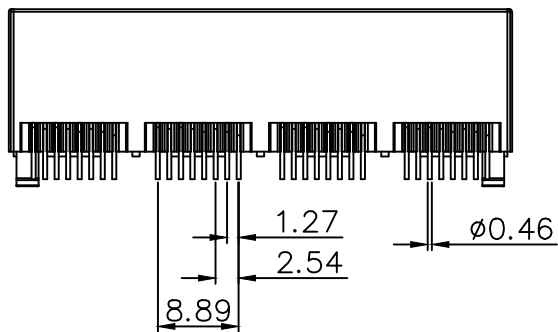
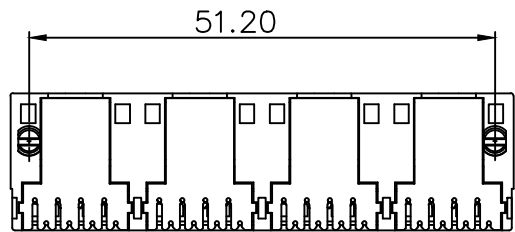


标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

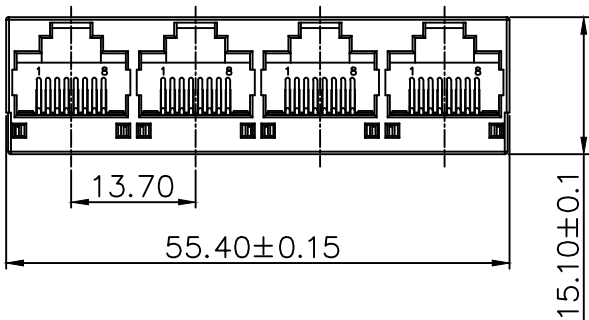

3D VIEW

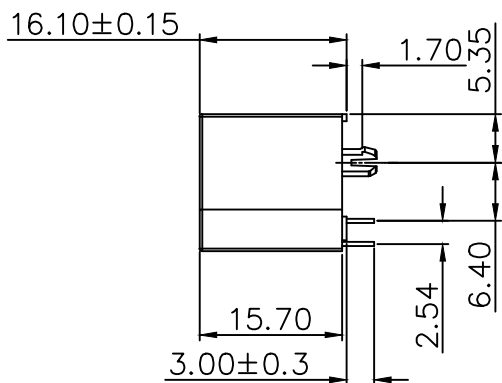

RECOMMENDED PCB LAYOUT
TOP VIEW(TOL:±0.05)

NOTES

1. MATERIAL:
 - 1.1. HOUSING: PBT ,COLOUR IS YELLOW;
 - 1.2. CONTACT: PHOSPHOR BRONZE,Ø0.46±0.02mm;
2. FINISH: GOLD PLATED OVER NI;
3. RECINNED PCB THICKNESS: 1.60mm;
4. ELECTRICAL:
 - 4.1. VOLTAGE RATING: 125 VAC RMS;
 - 4.2. CURRENT RATING: 1.5 AMP;
 - 4.3. CONTACT RESISTANCE: 35MILLIOHMS MAX.;
 - 4.4. WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz,1MIN.;
 - 4.5. INSULATION RESISTANCE: 1000MEGOHMS MIN @500V DC.;
5. MECHANICAL:
 - 5.1. MATING/UNMATING FORCE: 22N MAX.;
 - 5.2. RETENTIION STRENGTH: 50N MIN.;
 - 5.3. OPERATING LIFE: 750 CYCLES MIN.;
6. SALT SPRAY TEST: 12H;
7. SOLDERABILITY: 245±5°C,5±0.5S;
8. RESISTANCE TO SOLDER: 260±5°C,10±1S;
9. ENVIRONMENTAL:
 - 9.1. STORAGE TEMPERATURE RANGE: -40°C~+85°C
 - 9.2. OPERATION TEMPERATURE RANGE: -25°C~+70°C;
10. MATES WITH: MODULAR PLUGS THAT CONFORM TO FCC REGULATION PART 68.500;

2	接触	铜	镀金G/F	
1	基座	PBT	黄色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	网口	
			料 号 PART NO	HC-WK88-H161-1X4-Y	
UNLESS OTHERWISE, GENERAL TOLERANCE:		比 列 SCALE	1:1		
X. xxx ±0.10 X. xx ±0.20 X. x ±0.30		单 位 UNIT	MM	制 图 DRAW	AhYe
ANGULAR: X. xx° ±1° X. x° ±3° X. ° ±5°		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
		版 本 REV	A	批 准 APPROVE	赵亮亮

