

标记
MARKECN编号/变更内容
ECN NO/DEFINITION修改
REVISE日期
DATE核准
APPROVE

Pin

DIM A

DIM B

DIM C

DIM D

2

6.00

2.00

4.90

0.80

3

8.00

4.00

6.90

2.80

4

10.00

6.00

8.90

4.80

5

12.00

8.00

10.90

6.80

6

14.00

10.00

12.90

8.80

7

16.00

12.00

14.90

10.80

8

18.00

14.00

16.90

12.80

9

20.00

16.00

18.90

14.80

10

22.00

18.00

20.90

16.80

11

24.00

20.00

22.90

18.80

12

26.00

22.00

24.90

20.80

13

28.00

24.00

26.90

22.80

14

30.00

26.00

28.90

24.80

15

32.00

28.00

30.90

26.80





16

34.00

30.00

32.90

28.80

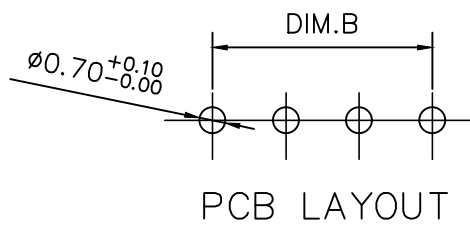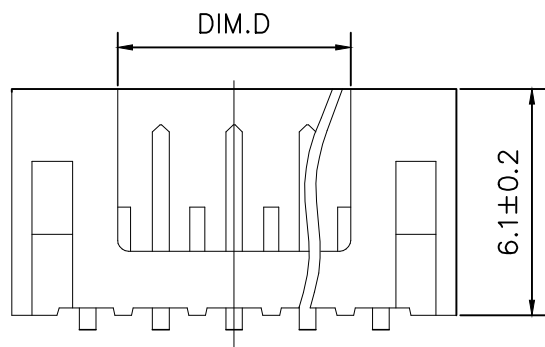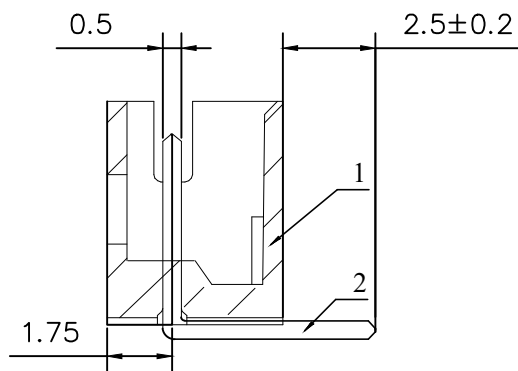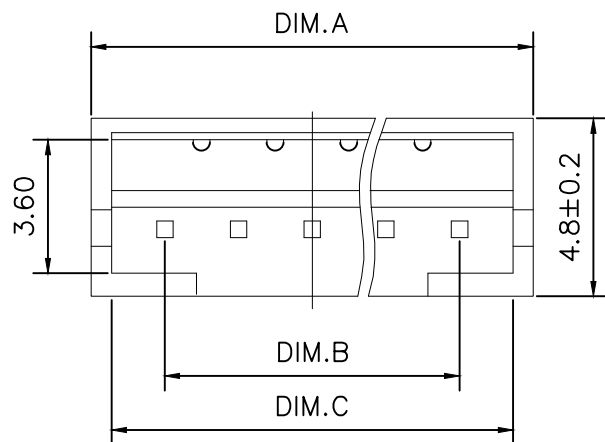

技术要求:

适应基板厚度: 1.2mm~1.6mm

温度范围: -25℃~85℃

额定电压: 200V AC/DC

额定电流: 1A

绝缘电阻: ≥1000MΩ

耐压: 800V AC/minute

2	插针	铜	镀锡	
1	基座	PA66	米色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品名 TITLE	针座	
			料号 PART NO	HC-PH2. 0-4AW-M	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比例 SCALE	1:1		
XX ±0.35	X' ±3.00'	单位 UNIT	MM	制图 DRAW	AhYe
XX ±0.25	X' ±2.00'	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
XXX ±0.15	XXX' ±1.00'	版本 REV	A	批准 APPROVE	赵亮亮

