

标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

PIN

尺寸 (mm)

A

B

C

02

1.25

4.25

3.05

03

2.50

5.50

4.30

04

3.75

6.75

5.55

05

5.00

8.00

6.80

06

6.25

9.25

8.05

07

7.50

10.50

9.30

08

8.75

11.75

10.55

09

10.00

13.00

11.80

10

11.25

14.25

13.05

11

12.50

15.50

14.30

12

13.75

16.75

15.55

13

15.00

18.00

16.80

14

16.25

19.25

18.05

15

17.50

20.50

19.30

16

18.75

21.75

20.55

技术要求:

额定电流: 1.0A AC,DC

(注: AWG32# 0.8A)

额定电压: 125V AC

温度范围: -30° C~85° C

接触电阻: $\leq 0.02 \Omega$ 绝缘电阻: $\geq 500M\Omega$

耐 压: 250V/min

适用导线规格: AWG26#~32#

适用印制板厚度: 0.8mm~1.6mm

2	接触	铜	镀锡	
1	基座	PA66	米色	
序号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名

TITLE

料 号

PART NO

针座

HC-MX1.25-8A

GENERAL TOLERANCES
(UNLESS SPECIFIED)比 列
SCALE

1:1

X.±0.30

X.±5'

.X±0.25

.X±3'

.XX±0.20

.XX±1'

单 位
UNIT

MM

张 数
PART NO

1 OF 1

版 本
REV






A

制 图
DRAW审 核
CHECKED批 准
APPROVE

AhYe

夏操云

赵亮亮

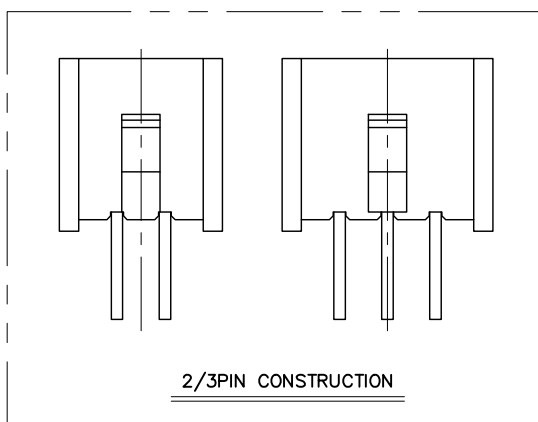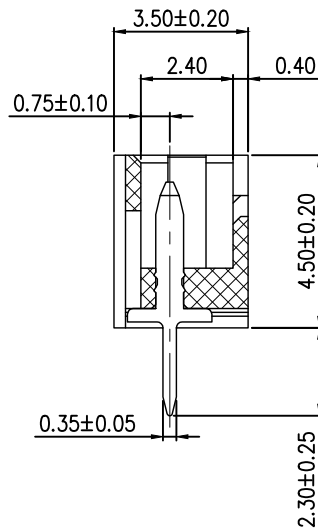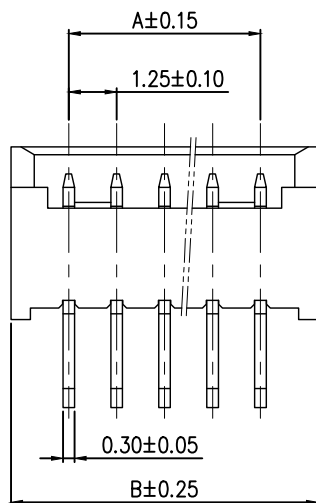

PCB Layout

TOL: ±0.05