

标 记  
MARKECN编号/变更内容  
ECN NO/DEFINITION修 改  
REVISE日 期  
DATE核 准  
APPROVE

PIN


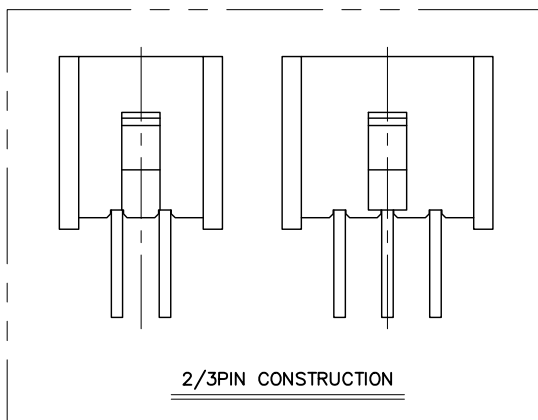

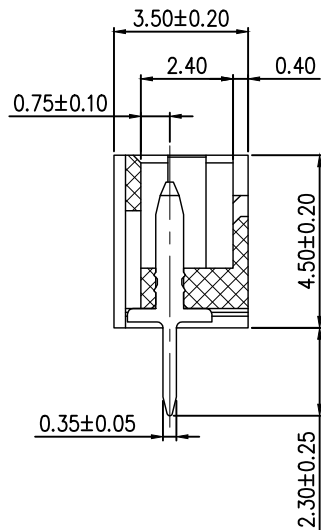
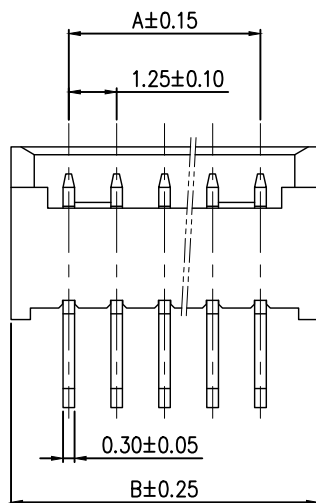
尺寸 (mm)

A

B

C

| PIN | A     | B     | C     |
|-----|-------|-------|-------|
| 02  | 1.25  | 4.25  | 3.05  |
| 03  | 2.50  | 5.50  | 4.30  |
| 04  | 3.75  | 6.75  | 5.55  |
| 05  | 5.00  | 8.00  | 6.80  |
| 06  | 6.25  | 9.25  | 8.05  |
| 07  | 7.50  | 10.50 | 9.30  |
| 08  | 8.75  | 11.75 | 10.55 |
| 09  | 10.00 | 13.00 | 11.80 |
| 10  | 11.25 | 14.25 | 13.05 |
| 11  | 12.50 | 15.50 | 14.30 |
| 12  | 13.75 | 16.75 | 15.55 |
| 13  | 15.00 | 18.00 | 16.80 |
| 14  | 16.25 | 19.25 | 18.05 |
| 15  | 17.50 | 20.50 | 19.30 |
| 16  | 18.75 | 21.75 | 20.55 |

PCB Layout  
TOL: ±0.05

技术要求:

额定电流: 1.0A AC,DC

(注: AWG32# 0.8A)

额定电压: 125V AC

温度范围: -30° C~85° C

接触电阻: ≤0.02 Ω

绝缘电阻: ≥500M Ω

耐 压: 250V/min

适用导线规格: AWG26#~32#

适用印制板厚度: 0.8mm~1.6mm

| 2  | 接触  | 铜    | 镀锡    |     |
|----|-----|------|-------|-----|
| 1  | 基座  | PA66 | 米色    |     |
| 序号 | 品 名 | 材 质  | 电镀/颜色 | 备 注 |




深圳市虹成电子有限公司

|                |              |
|----------------|--------------|
| 品 名<br>TITLE   | 针座           |
| 料 号<br>PART NO | HC-MX1.25-9A |

GENERAL TOLERANCES  
(UNLESS SPECIFIED)比 例  
SCALE

1:1



X.±0.30

X.±5'

单 位  
UNIT

MM

制 图  
DRAW

AhYe

.X±0.25

.X±3'

张 数  
PART NO

1 OF 1

审 核  
CHECKED

夏操云

.XX±0.20

.XX±1'

版 本  
REV

A

批 准  
APPROVE

赵亮亮

