
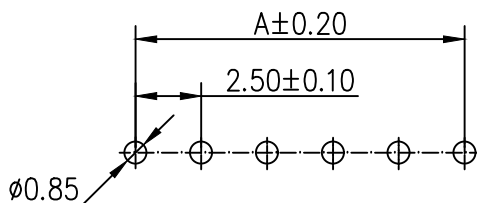
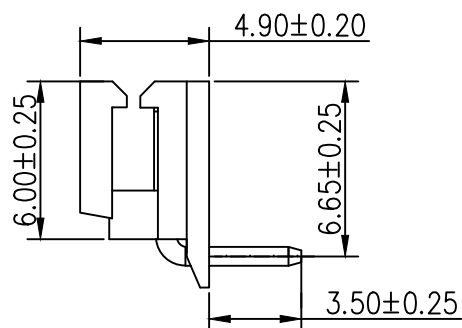
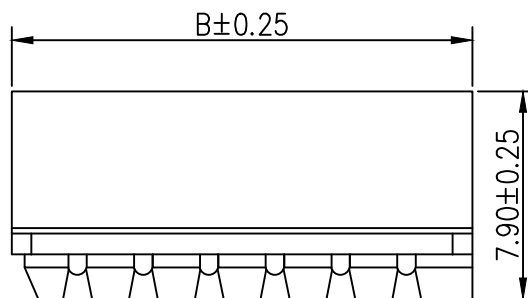
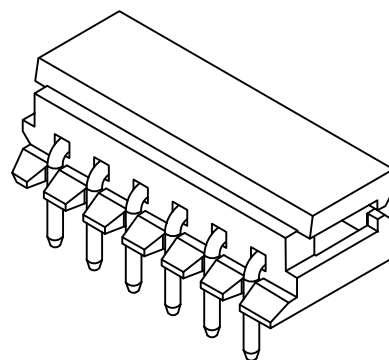


标 记
MARKPCN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

PIN

尺寸 (mm)

	A	B	C
02AWD	2.50	7.50	6.20
03AWD	5.00	10.00	8.70
04AWD	7.50	12.50	11.20
05AWD	10.00	15.00	13.70
06AWD	12.50	17.50	16.20
07AWD	15.00	20.00	18.70
08AWD	17.50	22.50	21.20
09AWD	20.00	25.00	23.70
10AWD	22.50	27.50	26.20
11AWD	25.00	30.00	28.70
12AWD	27.50	32.50	31.20

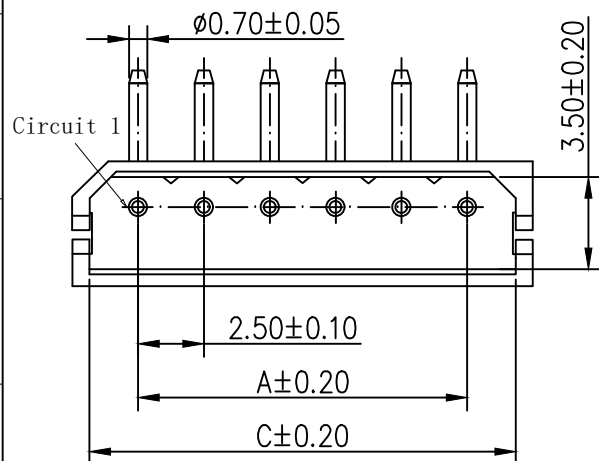

SPECIFICATIONS

- 1.Current Rating: 3A AC, DC
- 2.Voltage Rating: 250V AC, DC
- 3.Temperatuer Range: -25°C~+85°C
- 4.Contact Resistance: 20mΩ Max
- 5.Insulation Resistance: 1000MΩ Min
- 6.Withstanding Voltang: 1000V AC/minute
- 7.Material: Wafer PA66
PIN Brass Tin-plated

2	插针	铜	镀锡	
1	基座	PA66	白色	
序号	品名	材质	电镀/颜色	备注

	深圳市虹成电子有限公司		品名 TITLE	针座	
			料号 PART NO	5264-5AWD-TW	
一般公差 TOLERANCE		比列 SCALE	1:1		
X.±0.25	X."±2"	单位 UNIT	MM	制图 DRAW	AhYe
.X±0.25	.X"±1"	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
.XX±0.15	.XX"±0.5"	版本 REV	A	批准 APPROVE	赵亮亮
.XXX±0.10	.XXX"±0.5"				