
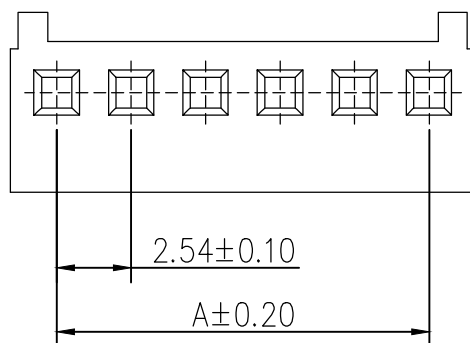


尺寸 (mm)

编号	A	B
02Y	2.54	5.68
03Y	5.08	8.22
04Y	7.62	10.76
05Y	10.16	13.30
06Y	12.70	15.84
07Y	15.24	18.38
08Y	17.78	20.92
09Y	20.32	23.46
10Y	22.86	26.00
11Y	25.40	28.54
12Y	27.94	31.08
13Y	30.48	33.62
14Y	33.02	36.16
15Y	35.56	38.70
16Y	38.10	41.24

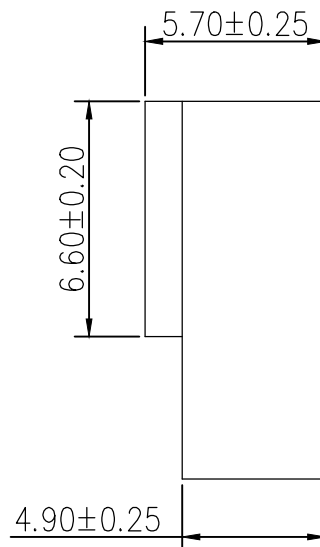

- 1.Current Rating: 4A AC, DC
- 2.Voltage Rating: 250V AC, DC
- 3.Temperatuer Range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- 4.Contact Resistance: 20m Ω Max
- 5.Insulation Resistance: 1000M Ω Min
- 6.Withstanding Voltang: 1000V AC/minute
- 7.Material: Nylon66

	深圳市虹成电子有限公司	品 名	胶壳
		TITLE	
		料 号	HC-JK-XH2510-4
		PART NO	

一般公差 TOLERANCE		比 例 SCALE	1 : 1		
X.±0.25 X.±2'	单 位 UNIT	MM	制 图 DRAW	AhYe	
.X±0.20 .X±1'	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云	
.XX±0.15 .XX±0.5'	版 本 REV	A	批 准 APPROVE	赵亮亮	
.XXX±0.10 .XXX±0.5'					