
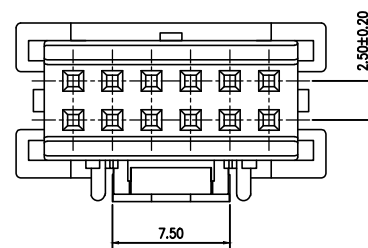
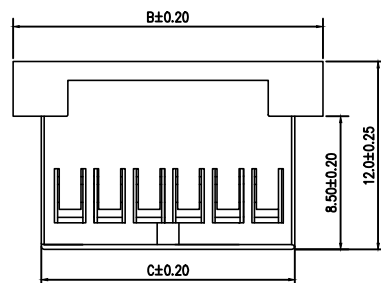





标 记
MARKECN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE



No. of Contacts	DIM A	DIM B	DIM C
4	7.5	15.0	11.2
5	10.0	17.5	13.7
6	12.5	20.0	16.2
7	15.0	22.5	18.7
8	17.5	25.0	21.2
9	20.0	27.5	23.7
10	22.5	30.0	26.2
11	25.0	32.5	28.7
12	27.5	35.0	31.2
13	30.0	37.5	33.7
14	32.5	40.0	36.2
15	35.0	42.5	38.7
16	37.5	45.0	41.2

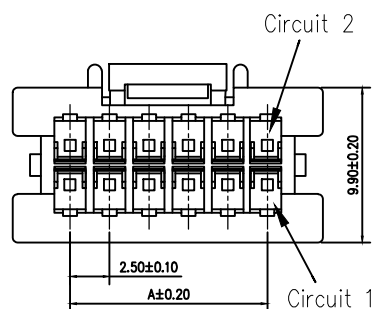



2*8 (含8Y) 以下

SPECIFICATIONS

- 1.Current Rating: 3A AC, DC
- 2.Voltage Rating: 250V AC, DC
- 3.Temperatuer Range: -25°C~+85°C
- 4.Contact Resistance: 20mΩ Max
- 5.Insulation Resistance: 1000MΩ Min
- 6.Withstanding Voltang: 1000V AC/minute
- 7.Material: PA66



2*4Y



2*5Y-2*8Y

1	胶壳	PA66	白色	
序号	品名	材质	电镀/颜色	备注



深圳市虹成电子有限公司

品名 TITLE	胶壳
料号 PART NO	HC-XAD2. 54-2x5Y

GENERAL TOLERANCES
(UNLESS SPECIFIED)比 列
SCALE

1:1

X.±0.25	X.±2°
.X±0.25	.X'±1°
.XX±0.15	.XX'±0.5°
.XXX±0.10	.XXX'±0.5°

单 位
UNIT

MM

张 数
PART NO

1 OF 1

版 本
REV

A

制 图
DRAW审 核
CHECKED批 准
APPROVE

AhYe

夏操云

赵亮亮

