
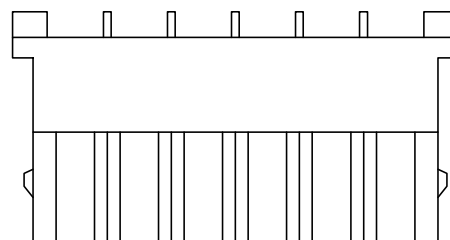
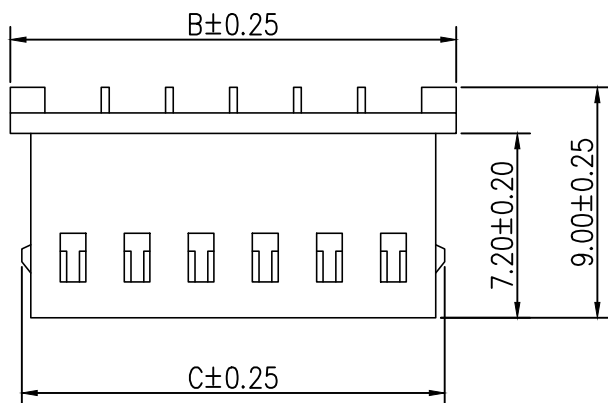
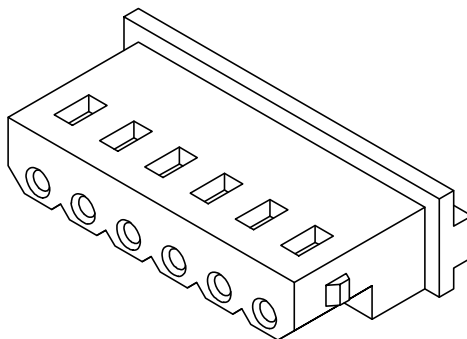


标 记
MARKPCN编号/变更内容
PCN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

PIN

尺寸 (mm)



	A	B	C
02	2.50	7.40	6.50
03	5.00	9.90	9.00
04	7.50	12.40	11.50
05	10.00	14.90	14.00
06	12.50	17.40	16.50
07	15.00	19.90	19.00
08	17.50	22.40	21.50
09	20.00	24.90	24.00
10	22.50	27.40	26.50
11	25.00	29.90	29.00
12	27.50	32.40	31.50

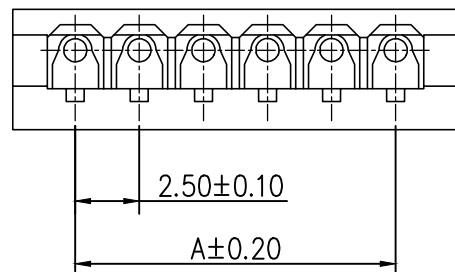

SPECIFICATIONS

- 1.Current Rating: 3A AC, DC
- 2.Voltage Rating: 250V AC, DC
- 3.Temperatuer Range: -25°C~+85°C
- 4.Contact Resistance: 20mΩ Max
- 5.Insulation Resistance: 1000MΩ Min
- 6.Withstanding Voltang: 1000V AC/minute
- 7.Material: Wafer PA66
PIN Brass Tin-plated

Circuit 1

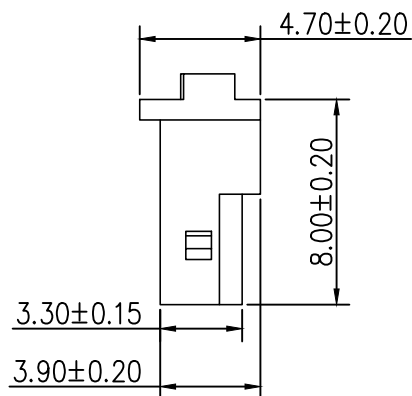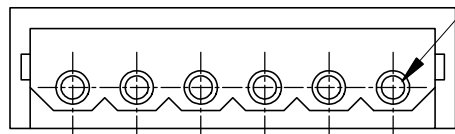

1	基座	PA66	本色	
序号	品名	材 质	电镀/颜色	备注

	深圳市虹成电子有限公司		品 名 TITLE	胶壳	
			料 号 PART NO	HC-JK-5264-2Y	
一般公差 TOLERANCE		比 列 SCALE	1:1		
X.±0.25	X.*±2°	单 位 UNIT	MM	制 图 DRAW	AhYe
.X±0.25	.X*±1°	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
.XX±0.15	.XX*±0.5°	版 本 REV	A	批 准 APPROVE	赵亮亮
.XXX±0.10	.XXX*±0.5°				