

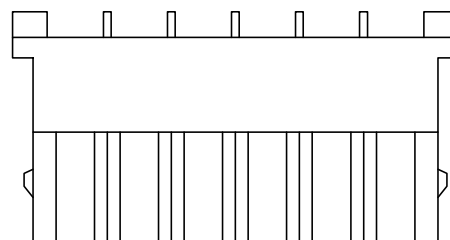
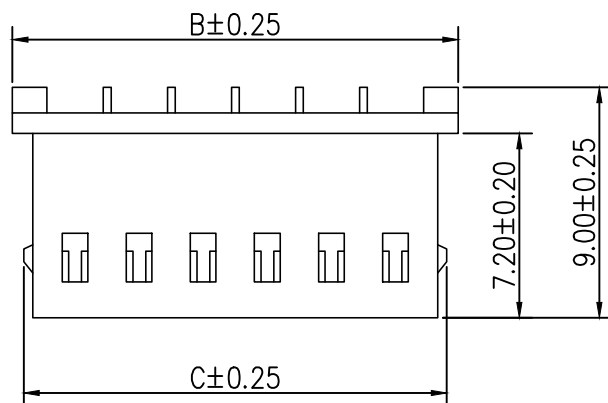



PIN	尺寸 (mm)		
	A	B	C
02	2.50	7.40	6.50
03	5.00	9.90	9.00
04	7.50	12.40	11.50
05	10.00	14.90	14.00
06	12.50	17.40	16.50
07	15.00	19.90	19.00
08	17.50	22.40	21.50
09	20.00	24.90	24.00
10	22.50	27.40	26.50
11	25.00	29.90	29.00
12	27.50	32.40	31.50

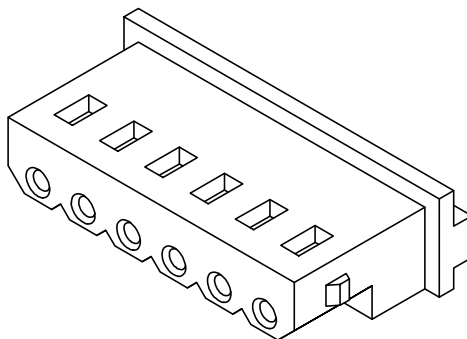

- 1.Current Rating:3A AC, DC
- 2.Voltage Rating:250V AC, DC
- 3.Temperatuer Range:−25°C~+85°C
- 4.Contact Resistance:20mΩ Max
- 5.Insulation Resistance: 1000MΩ Min
- 6.Withstanding Voltang: 1000V AC/minute
- 7.Material:Wafer PA66
PIN Brass Tin-plated

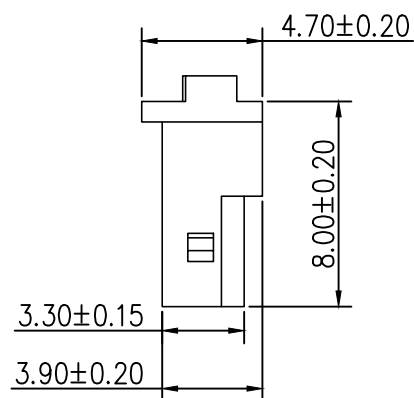

Circuit 1

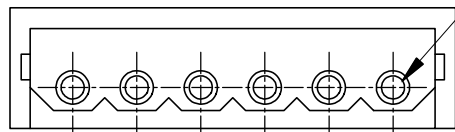

	深圳市虹成电子有限公司		品 名 TITLE		胶壳	
			料 号 PART NO		HC-JK-5264-4Y	
一般公差 TOLERANCE		比 例 SCALE	1:1			
X.±0.25 X.*±2'		单 位 UNIT	MM	制 图 DRAW	AhYe	
.X±0.25 .X*±1'		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云	
.XX±0.15 .XX*±0.5'		版 本 REV	A	批 准 APPROVE	赵亮亮	
.XXX±0.10 .XXX*±0.5'						