
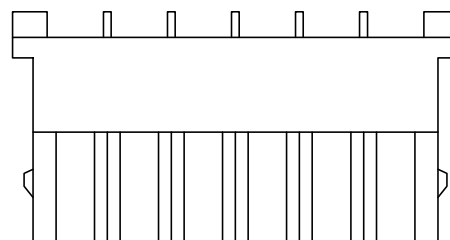
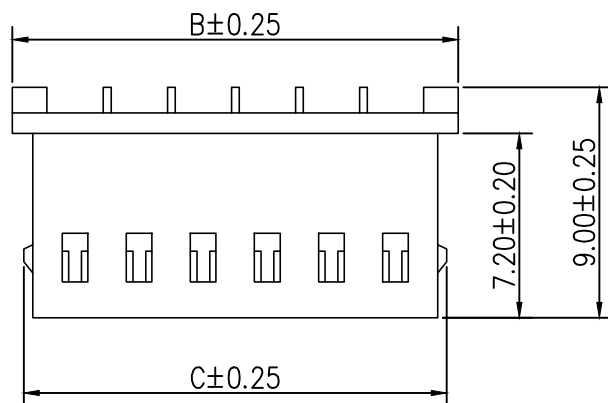
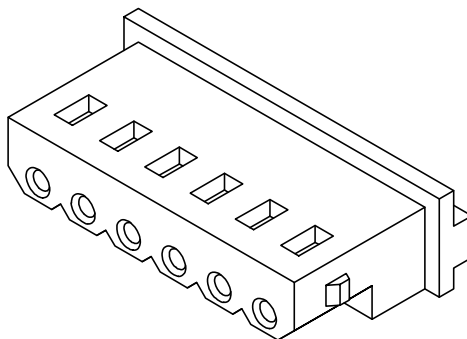


标 记
MARKPCN编号/变更内容
ECN NO/DEFINITION修 改
REVISE日 期
DATE核 准
APPROVE

PIN

尺寸 (mm)



	A	B	C
02	2.50	7.40	6.50
03	5.00	9.90	9.00
04	7.50	12.40	11.50
05	10.00	14.90	14.00
06	12.50	17.40	16.50
07	15.00	19.90	19.00
08	17.50	22.40	21.50
09	20.00	24.90	24.00
10	22.50	27.40	26.50
11	25.00	29.90	29.00
12	27.50	32.40	31.50

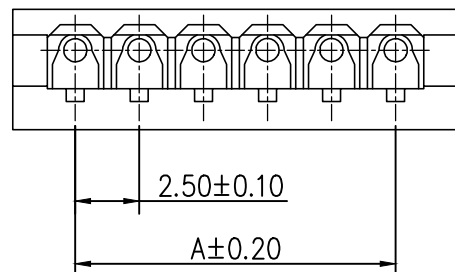

SPECIFICATIONS

- 1.Current Rating: 3A AC, DC
- 2.Voltage Rating: 250V AC, DC
- 3.Temperature Range: -25°C~+85°C
- 4.Contact Resistance: 20mΩ Max
- 5.Insulation Resistance: 1000MΩ Min
- 6.Withstanding Voltage: 1000V AC/minute
- 7.Material: Wafer PA66
PIN Brass Tin-plated

Circuit 1

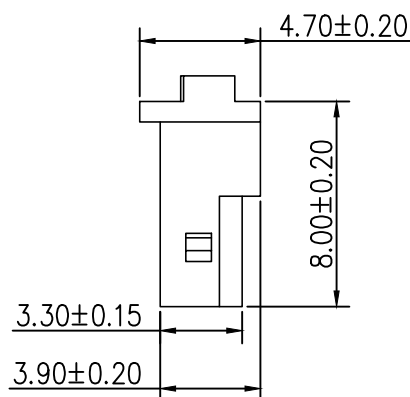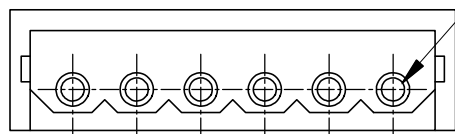

1	基座	PA66	本色	
序号	品名	材质	电镀/颜色	备注



深圳市虹成电子有限公司


品 名
TITLE
料 号
PART NO

胶壳

HC-JK-5264-6Y

一般公差
TOLERANCE比 例
SCALE

1:1



X.±0.25 X.'±2'

单 位
UNIT

MM

制 图
DRAW

AhYe

.X±0.25 .X'±1'

张 数
PART NO

1 OF 1

审 核
CHECKED

夏操云

.XX±0.15 .XX'±0.5'

版 本
REV

A

批 准
APPROVE

赵亮亮

.XXX±0.10 .XXX'±0.5'

