
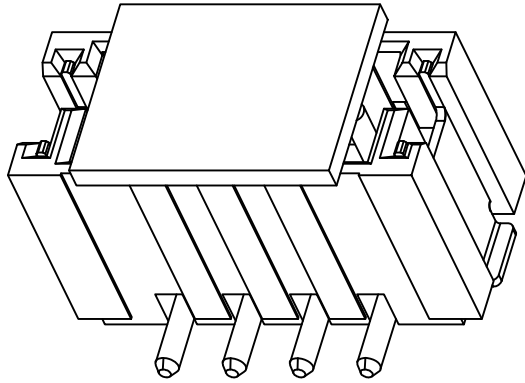




标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE

A

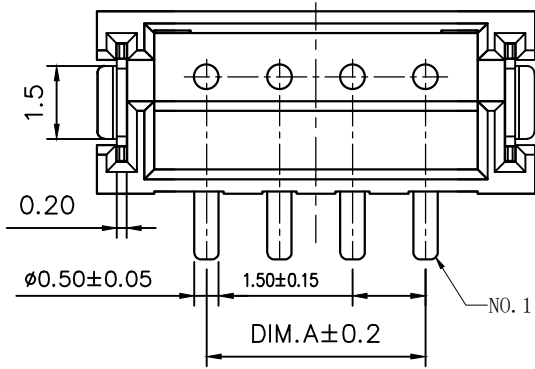



B

C

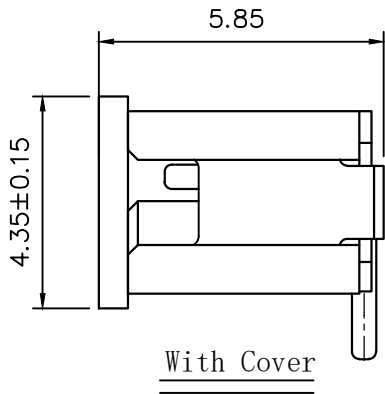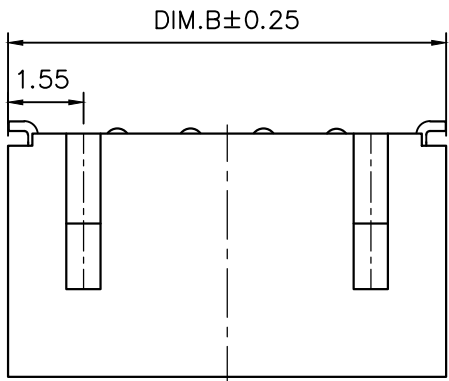

D

E

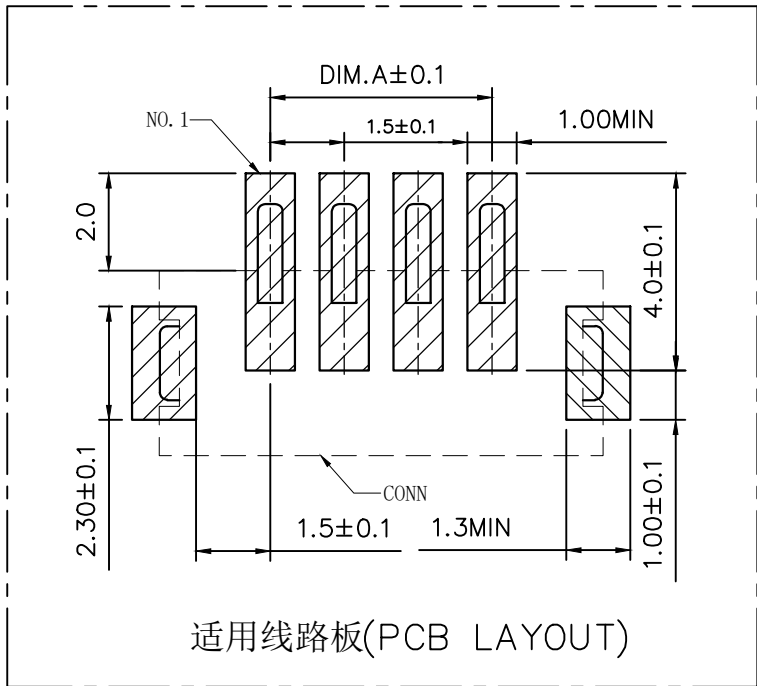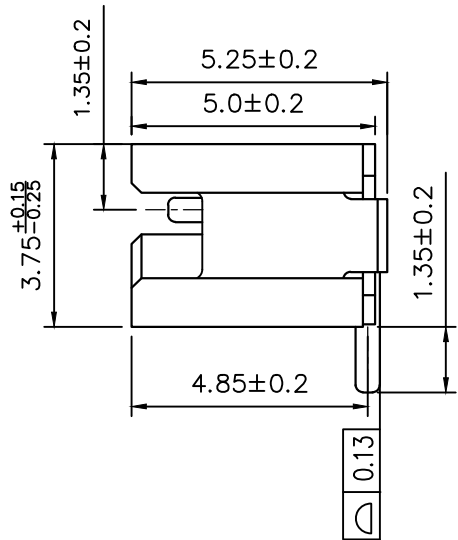

F

G

	CKI	DIM A	DIM B
2	1.50	6.00	
3	3.00	7.50	
4	4.50	9.00	
5	6.00	10.50	
6	7.50	12.00	
7	9.00	13.50	
8	10.50	15.00	
9	12.00	16.50	
10	13.50	18.00	
11	15.00	19.50	
12	16.50	21.00	
13	18.00	22.50	
14	19.50	24.00	
15	21.00	25.50	
16	22.50	27.00	
17	24.00	28.50	
18	25.50	30.00	
19	27.00	31.50	
20	28.50	33.00	

A

B

C

D

E

F

G

技术指标:

1. 温度范围: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
2. 额定电压: 100V, AC/DC
3. 接触电阻: $\leq 0.02\Omega$
4. 绝缘电阻: $\geq 500\text{M}\Omega$
5. 额定电流: 1A, AC/DC

2	插针	铜	镀锡	
1	基座	LCP	本色	
序 号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名
TITLE

针座

料 号
PART NO

HCZZ0068-9

GENERAL TOLERANCES
(UNLESS SPECIFIED)

比 列
SCALE

1:1

单 位
UNIT

MM

张 数
PART NO

1 OF 1

版 本
REV

A

制 图
DRAW

AhYe

审 核
CHECKED

夏操云

批 准
APPROVE

赵亮亮

