
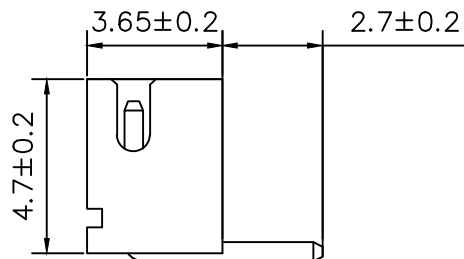


标记  
MARKECN编号/变更内容  
ECN NO/DEFINITION修改  
REVISE日期  
DATE核准  
APPROVE

| Pin | DIM A | DIM B | DIM C |
|-----|-------|-------|-------|
| 2   | 4.50  | 1.50  | 3.60  |
| 3   | 6.00  | 3.00  | 5.10  |
| 4   | 7.50  | 4.50  | 6.60  |
| 5   | 9.00  | 6.00  | 8.10  |
| 6   | 10.50 | 7.50  | 9.60  |
| 7   | 12.00 | 9.00  | 11.10 |
| 8   | 13.50 | 10.50 | 12.60 |
| 9   | 15.00 | 12.00 | 14.10 |
| 10  | 16.50 | 13.50 | 15.60 |
| 11  | 18.00 | 15.00 | 17.10 |
| 12  | 19.50 | 16.50 | 18.60 |
| 13  | 21.00 | 18.00 | 20.10 |
| 14  | 22.50 | 19.50 | 21.60 |
| 15  | 24.00 | 21.00 | 23.10 |
| 16  | 25.50 | 22.50 | 24.60 |

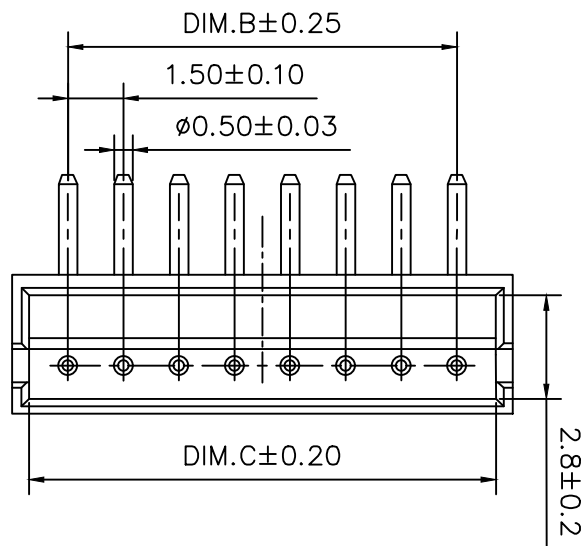

技术要求:

适应基板厚度: 1.2mm~1.6mm



温度范围: -25℃~85℃

额定电压: 100V AC/DC

额定电流: 1A

绝缘电阻: ≥1000MΩ

耐压: 800V AC/minute

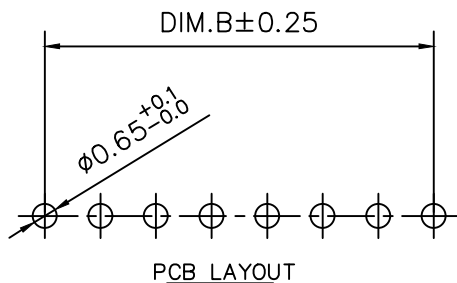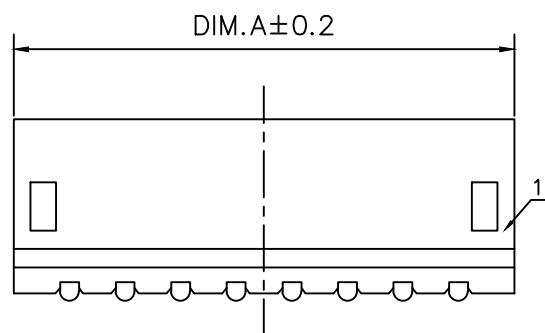

|    |    |      |       |    |
|----|----|------|-------|----|
| 2  | 插针 | 铜    | 镀锡    |    |
| 1  | 底座 | PA66 | 米色    |    |
| 序号 | 品名 | 材质   | 电镀/颜色 | 备注 |

|                                          |             |               |               |               |      |
|------------------------------------------|-------------|---------------|---------------|---------------|------|
|                                          | 深圳市虹成电子有限公司 |               | 品名<br>TITLE   | 针座            |      |
|                                          |             |               | 料号<br>PART NO | HCZZ0002-8    |      |
| GENERAL TOLERANCES<br>(UNLESS SPECIFIED) |             | 比例<br>SCALE   | 1:1           |               |      |
| XX ±0.35                                 | X' ±3.00"   | 单位<br>UNIT    | MM            | 制图<br>DRAW    | AhYe |
| XX ±0.25                                 | X' ±2.00"   | 张数<br>PART NO | 1 OF 1        | 审核<br>CHECKED | 夏操云  |
| XXX ±0.15                                | XXX' ±1.00" | 版本<br>REV     | A             | 批准<br>APPROVE | 赵亮亮  |

