

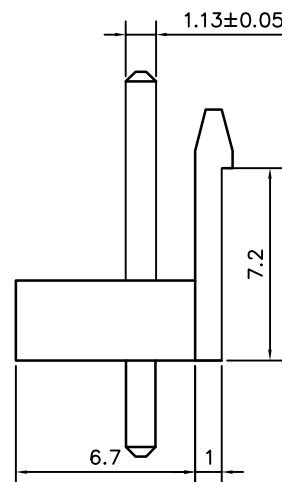


Pin	DIM A	DIM B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52

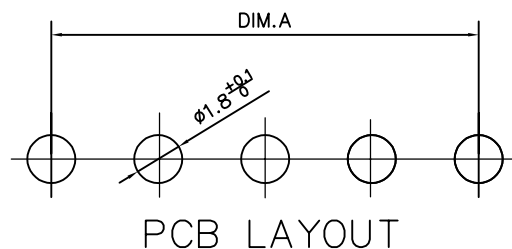

耐 压: 1500V AC/minute



	深圳市虹成电子有限公司		品 名	针座	
			TITLE		
			料 号	HC-VH-5A-TW	
GENERAL TOLERANCES (UNLESS SPECIFIED)			比 列	1:1	
X.X ±0.35	X'. ±3.00'	单 位	MM	制 图	AhYe
X.XX ±0.25	X.X' ±2.00'	张 数	1 OF 1	审 核	夏操云
X.XXX ±0.15	X.XX' ±1.00'	PART NO		CHECKED	
		版 本	A	批 准	赵亮亮
		REV		APPROVE	