
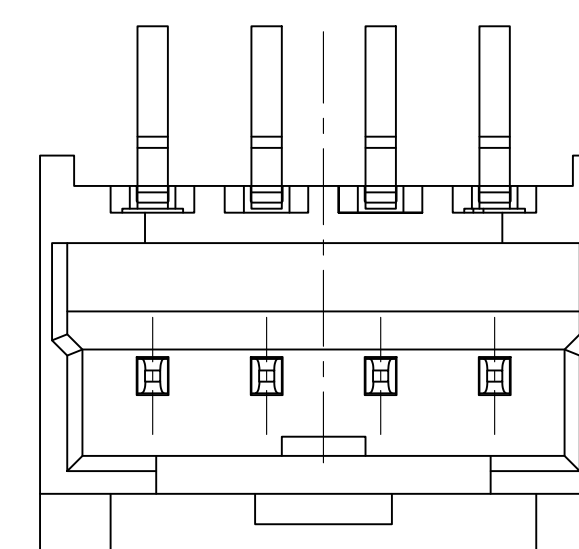
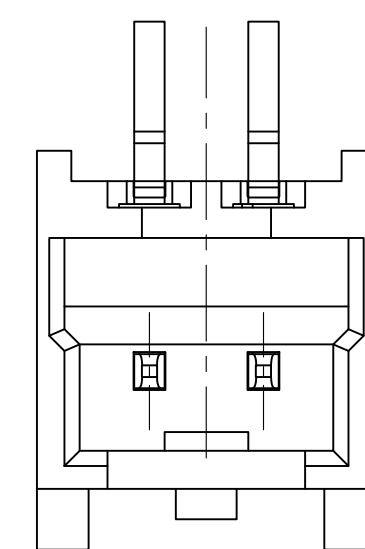
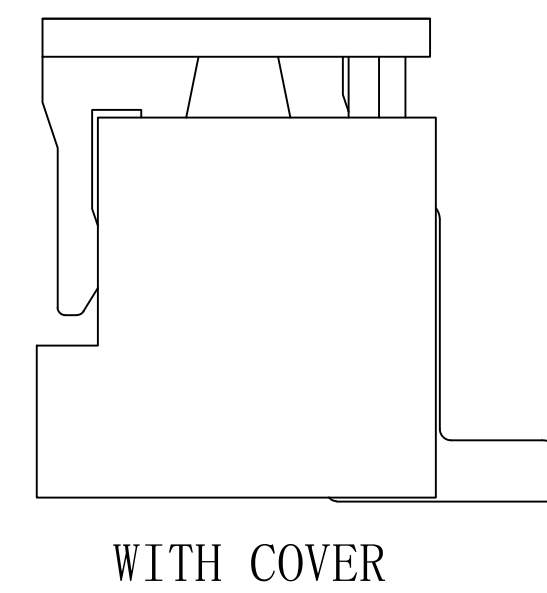


CKI	DIM A	DIM B	DIM C	A
2	1.50	3.35	4.46	
3	3.00	4.85	5.96	
4	4.50	6.35	7.46	
5	6.00	7.85	8.96	B
6	7.50	9.35	10.46	
7	9.00	10.85	11.96	
8	10.50	12.35	13.46	
9	12.00	13.85	14.96	
10	13.50	15.35	16.46	
11	15.00	16.85	17.96	
12	16.50	18.35	19.46	
13	18.00	19.85	20.96	C
14	19.50	21.35	22.46	
15	21.00	22.85	23.96	


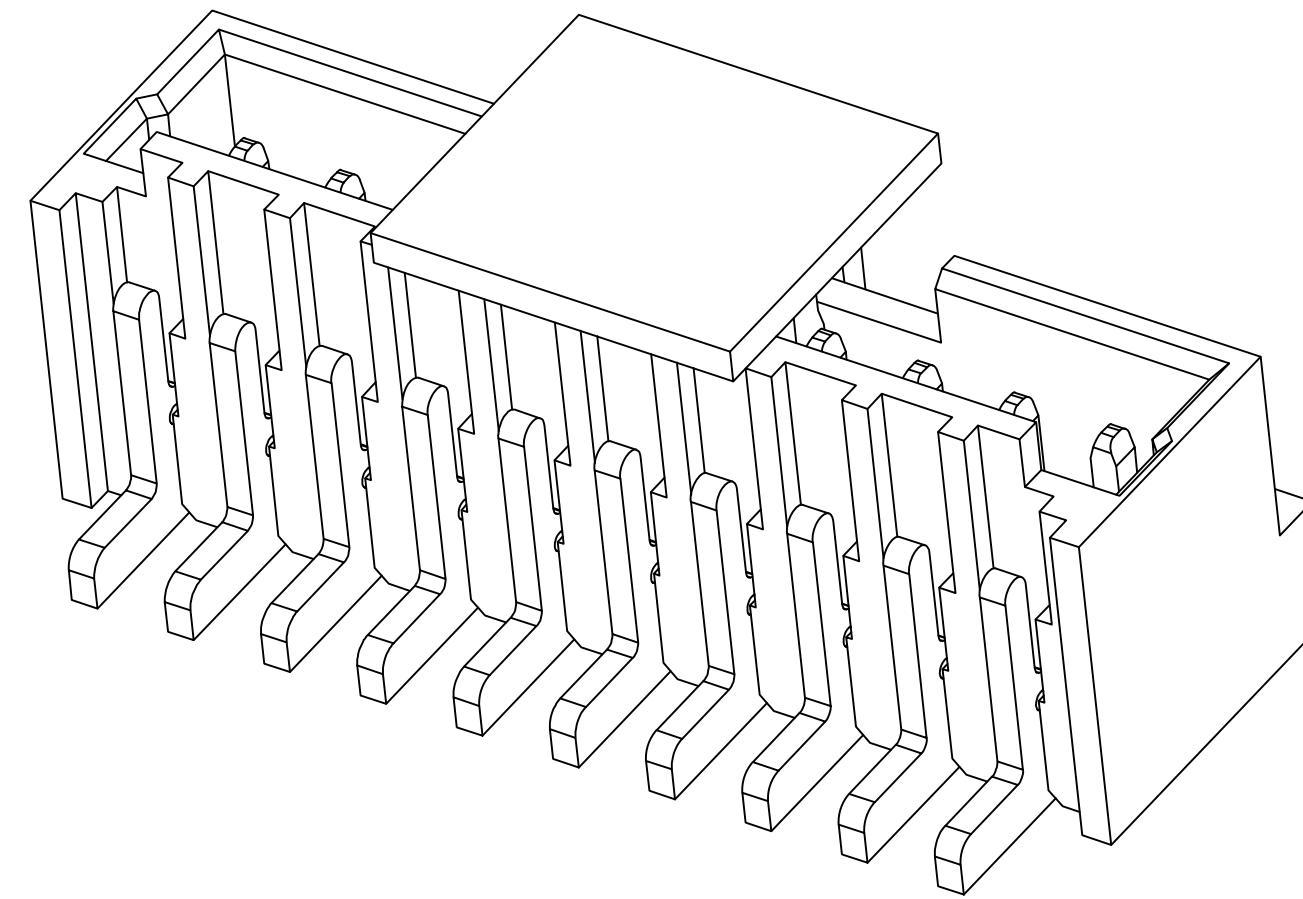


PIN 2~3


PIN 4~7

技术指标:

1. 温度范围: $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$
2. 额定电压: 350V, AC/DC
3. 接触电阻: $\leq 0.02\Omega$
4. 绝缘电阻: $\geq 1000\text{M}\Omega$
5. 额定电流: 3A, AC/DC

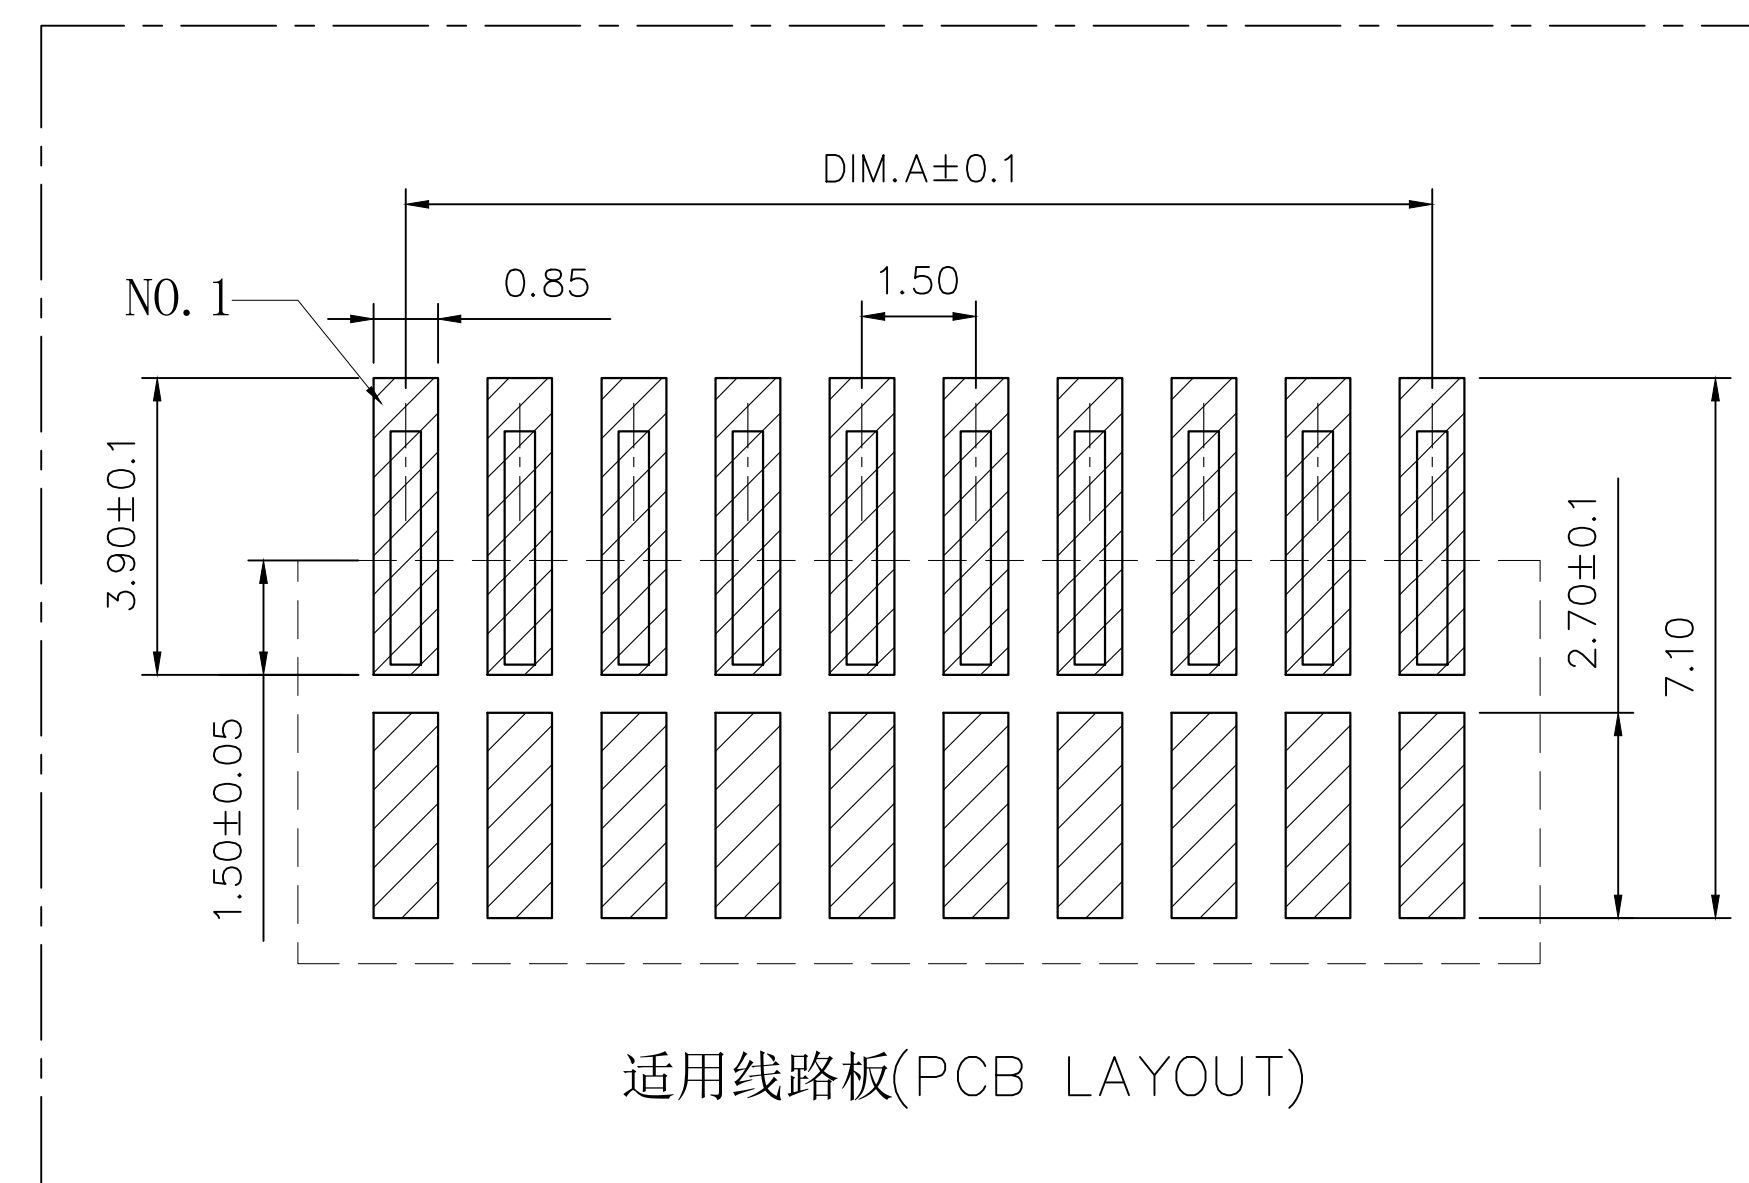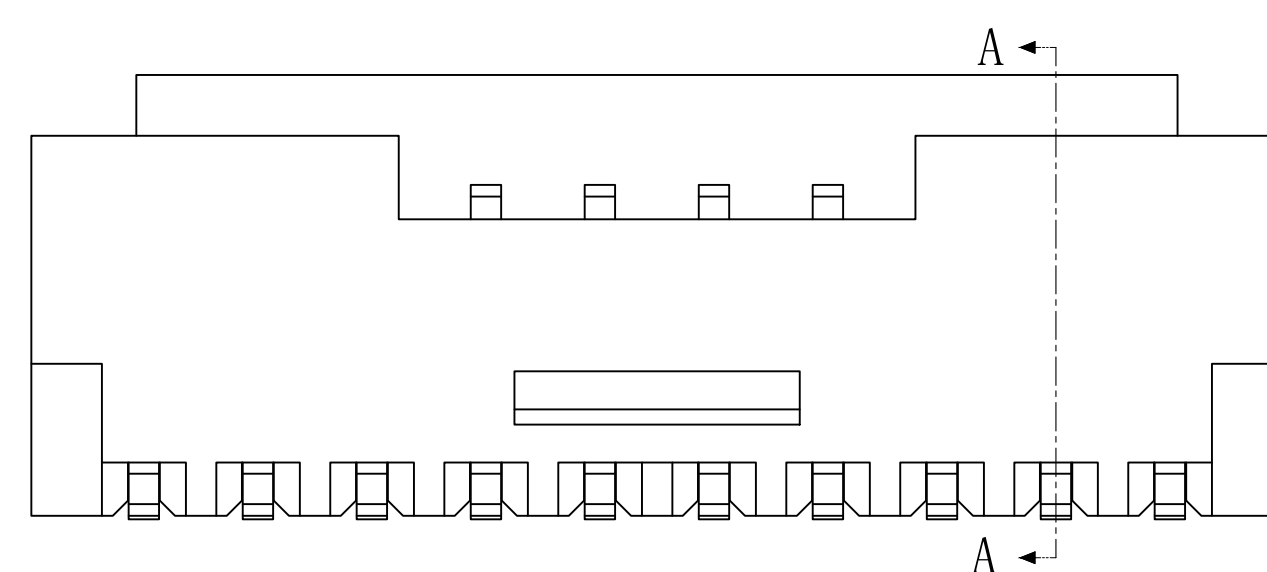

2	插针	铜	镀锡	
1	基座	PA6T	米色	
序 号	品 名	材 质	电镀/颜色	备 注

	深圳市虹成电子有限公司		品 名 TITLE	针座	
			料 号 PART NO	HC-ZE1.5-4PLT	
GENERAL TOLERANCES (UNLESS SPECIFIED)		比 列 SCALE	1:1		
X. ± 0.50 .XX ± 0.10 .X ± 0.20 .XXX ± 0.05 ANGLES $\pm 1^\circ$		单 位 UNIT	MM	制 图 DRAW	AhYe
		张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
		版 本 REV	A	批 准 APPROVE	赵亮亮
					