




标记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修改 REVISE	日期 DATE	核准 APPROVE



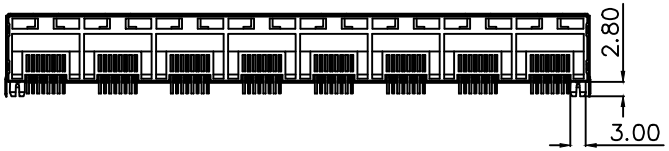

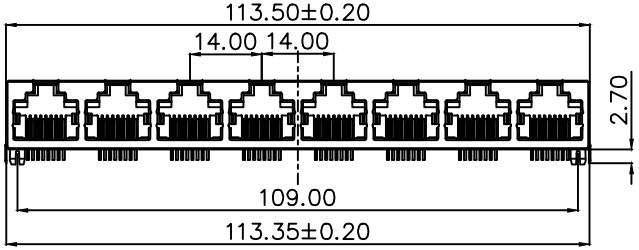


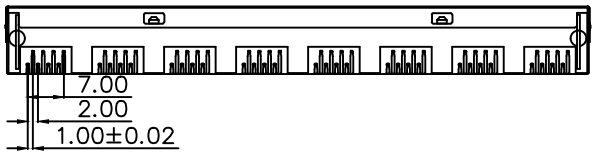


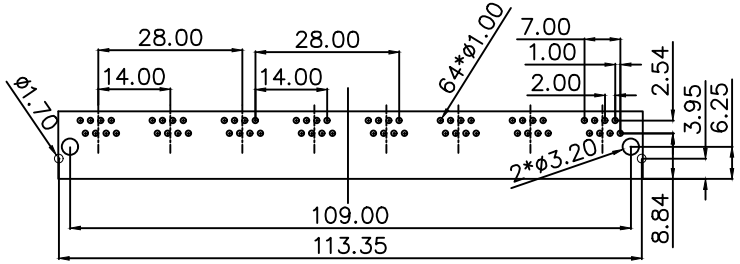

RECOMMENDED PCB LAYOUT

TOP VIEW(TOL:±0.05)

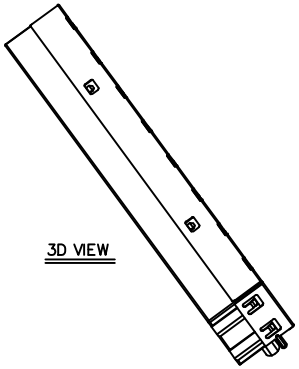



NOTES:

1. MATERIAL:
   1.1. HOUSING: PBT ,COLOR IS BLACK;
   1.2. CONTACT: PHOSPHOR BRONZE,ø0.46±0.02mm;
3. RECINNEBDED PCB THICKNESS: 1.0mm Min;
4. ELECTRICAL:
   4.1. VOLTAGE RATING: 125 VAC RMS;
   4.2. CURRENT RATING: 1.5 AMP;
   4.3. CONTACT RESISTANCE: 35MILLIOHMS MAX.;
   4.4. WITHSTAND VOLTAGE: 1000 VAC RMS 50(60)Hz, 1MIN.;
   4.5. INSULATION RESISTANCE: 1000MEGOHMS MIN @500V DC;
5. MECHANICAL:
   5.1. MATING/UNMATING FORCE: 30N MAX.;
   5.2. RETENTIION STRENGTH: 50N MIN.;
   5.3. OPERATING LIFE: 750 CYCLES MIN.;
6. SALT SPRAY TEST: 12H;
7. SOLDERABILITY: 245±5°C,5±0.5S;
8. RESISTANCE TO SOLDER: 260±5°C,10±1S;
9 ENVIRONMENTAL:
   9.1. STORAGE TEMPERATURE RANGE: -40°C~+85°C;
   9.2. OPERATION TEMPERATURE RANGE: -25°C~+70°C;

序号	品名	材质	电镀/颜色	备注
3	外壳	不锈钢	镀镍	
2	接触	铜	镀金G/F	
1	基座	PBT	黑色	

深圳市虹成电子有限公司	品名 TITLE	网口		
	料号 PART NO	HC-WK88-H132-1X8-55B		
UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10, X.xx ±0.20, X.x ±0.30; ANGULAR: X.xx° ±1°, X.x° ±3°, X.° ±5°	比列 SCALE	1:1		
	单位 UNIT	MM	制图 DRAW	AhYe
	张数 PART NO	1 OF 1	审核 CHECKED	夏操云
	版本 REV	A	批准 APPROVE	赵亮亮