



标 记 MARK	ECN编号/变更内容 ECN NO/DEFINITION	修 改 REVISE	日 期 DATE	核 准 APPROVE









3D VIEW

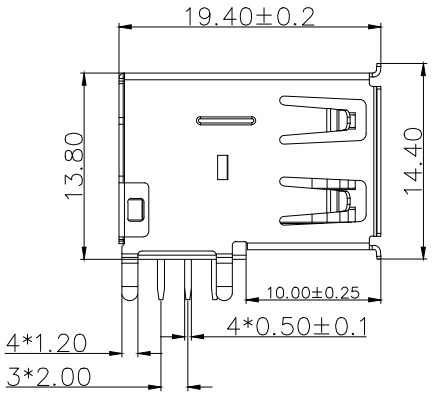


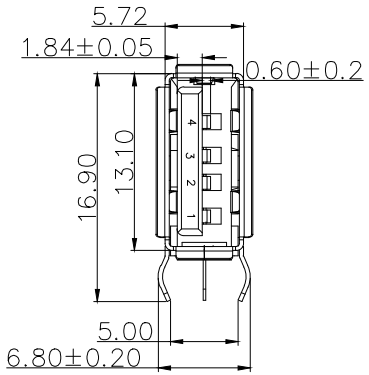





NOTES:

1. MATERIAL:
   - 1.1. HOUSING: PBT ,COLOR IS WHITE;
   - 1.2. CONTACT: BRASS,T=0.20±0.02mm;
   - 1.3. SHELL: SPCC,T=0.3±0.02mm;
2. FINISH:
   - 2.1. TERMINAL:
     CONTACT AREA: GOLD PLATED G/Fu″;
     SOLDER AREA: PLATED OVER TIN;
   - 2.2. SHELL: NI PLATED OVER ALL ;
3. RECINNEBDED PCB THICKNESS: 1.60mm;
4. ELECTRICAL:
   - 4.1. VOLTAGE RATING: 30 VAC RMS;
   - 4.2. CURRENT RATING: 1.5 AMP;
   - 4.3. CONTACT RESISTANCE: 30MILLIOHMS MAX.;
   - 4.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;
   - 4.5. INSULATION RESISTANCE: 1000MΩ MIN;
5. MECHANICAL:
   - 5.1. MATING FORCE: 35N MAX.;
   - 5.2. UNMATING FORCE: 8~35N;
   - 5.3. OPERATING LIFE: 1500 CYCLES MIN.;
6. ENVIRONMENTAL:
   - 6.1. STORAGE TEMPERATURE RANGE: -40° C~+85° C;
   - 6.2. OPERATION TEMPERATURE RANGE: -25° C~+70° C;
7. SALT SPRAY TEST:8H
8. SOLDERABILITY: 245±5° C,5±0.5S



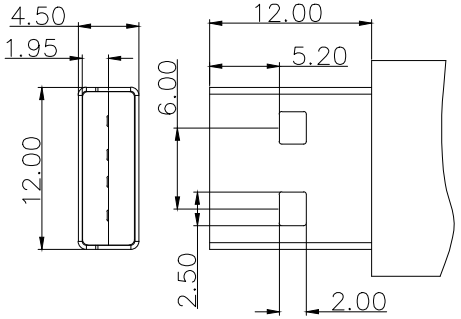

MATING PLUG



RECOMMEND PCB LAYOUT(±0.05)

序 号	品 名	材 质	电镀/颜色	备 注
3	外壳	铁	镀镍	
2	接触	铜	镀金	
1	基座	PBT	白色	

深圳市虹成电子有限公司		品 名 TITLE	USB座	
		料 号 PART NO	HC-USB2.0-L195-J	
UNLESS OTHERWISE, GENERAL TOLERANCE: X.xxx ±0.10 X.xx ±0.20 X.x ±0.30 ANGULAR: X.xx° ±1° X.x° ±3° X.° ±5°	比 列 SCALE	1:1		
	单 位 UNIT	MM	制 图 DRAW	AhYe
	张 数 PART NO	1 OF 1	审 核 CHECKED	夏操云
	版 本 REV	A	批 准 APPROVE	赵亮亮